Electrolux Prostore

400 liter digital freezers

The Electrolux Prostore range is produced for the customer who needs refrigeration products suitable for gastronorm containers. The product range is comprised of 400 liter models with full door either in AISI 304 or stainless steel. All the internal finishes are in stainless steel. The Prostore 400 liter models detailed on this sheet are freezers with remote or built in refrigeration unit.



Model 691221

MATERIALS
- Internal and external in stainless steel AISI 304 (galvanized back and exterior). Model PR04F1F4 is constructed in stainless steel.
- Runners and supports in stainless steel easily disassembled (without any tool) for more convenient cleaning.

EASY TO INSTALL
- All models require only 1 phase 220/240V supply. They can therefore be plugged straight into an existing power socket.

EASY TO USE
- Automatic evaporation of the defrosting water by hot gas on the top.
- Designed to operate at ambient temperatures up to +43 °C.
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Simple control panel: on/off switch, digital thermometer with increasing and reduction button, high/low humidity switch, control lamps and light switch.
- Self closing and reversible left/right doors (not for glass door)
- Door microswitch to stop the fan once the door is opened.
- Light as standard in all models.
- Easy access to the main components for an easy maintenance.

EASY TO MAINTAIN
- Insulation thickness: 60 mm to ensure effective insulation with minimum energy consumption.
- Door handle entirely in pressed stainless steel (without plastic) without joints gathering dust and dirt.
- Joints between side and bottom inner panels less than 0.5 mm (according to hygienic rules) in order to avoid the deposit of dirty residual that are origin of bacterial proliferation.
- Inner cell with rounded corners, bottom pressed in only one piece.

EASY ON THE ENVIRONMENT
• CFC and HCFC free environmentally friendly: R404a gas in refrigeration circuit. Gas in foam: Cyclopentane.
• Low noise level - less than 57 dB (A).
• Developed and produced in ISO 9001 and ISO 14001 certified factory.
• All models comply with the standards required by the main international approval bodies and are H marked.


	PR04F1F 691221	PR04F1FR 691222
TECHNICAL DATA		
Operating temperature - min/max °C	-22/-15	-22/-15
Operating mode	Ventilated	Ventilated
External material		
panels	304 AISI	304 AISI
Gross capacity (D.I.N. 8952) - l.	430	430
Cooling unit	Built-In	Remote
Control type	Digital	Digital
External dimensions - mm		
width	600	600
depth/with open doors	665, 1200	665, 1200
height	2112	2112
height adjustment	12, 30	
N° and type of door	1	1
Door hinges	Right Side	Right Side
N° and type of grids (included)	4, 530x400	4, 530x400
Compressor power - HP	1/2	
N° defrost in 24 hrs.	4/30' max	4/30'
Refrigerant type	R404a	R404a
Refrigerant quantity - g.	220	
Refrigeration power - W	640	
Refrigerant power		
at evaporation temperature - °C	-26	-26
Power - kW		
installed-electric	0.62	0.17
Net weight - kg.	115	105
INCLUDED ACCESSORIES		
PEDAL OPENING FOR REFRIGERATORS/FREEZERS	1	1
PLASTIC-COATED GRID 530x400	4	4
ACCESSORIES		
1/1 GN RILSAN STEEL WIRE BASKET H=150 MM	881043	881043
BASE FRAME TO SUPPORT TRAY RACK	880078	880078
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133
KIT HACCP EKIS		922166
PAIR OF RUNNERS FOR PROSTORE REFR.	880558	880558
PEDAL OPENING FOR REFRIGERATORS/FREEZERS	880172	880172
PLASTIC-COATED GRID 530x400	880307	880307
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457
STAINLESS STEEL GRID 530x400	880162	880162

HAHB020

2009-10-06

Subject to change without notice

691221

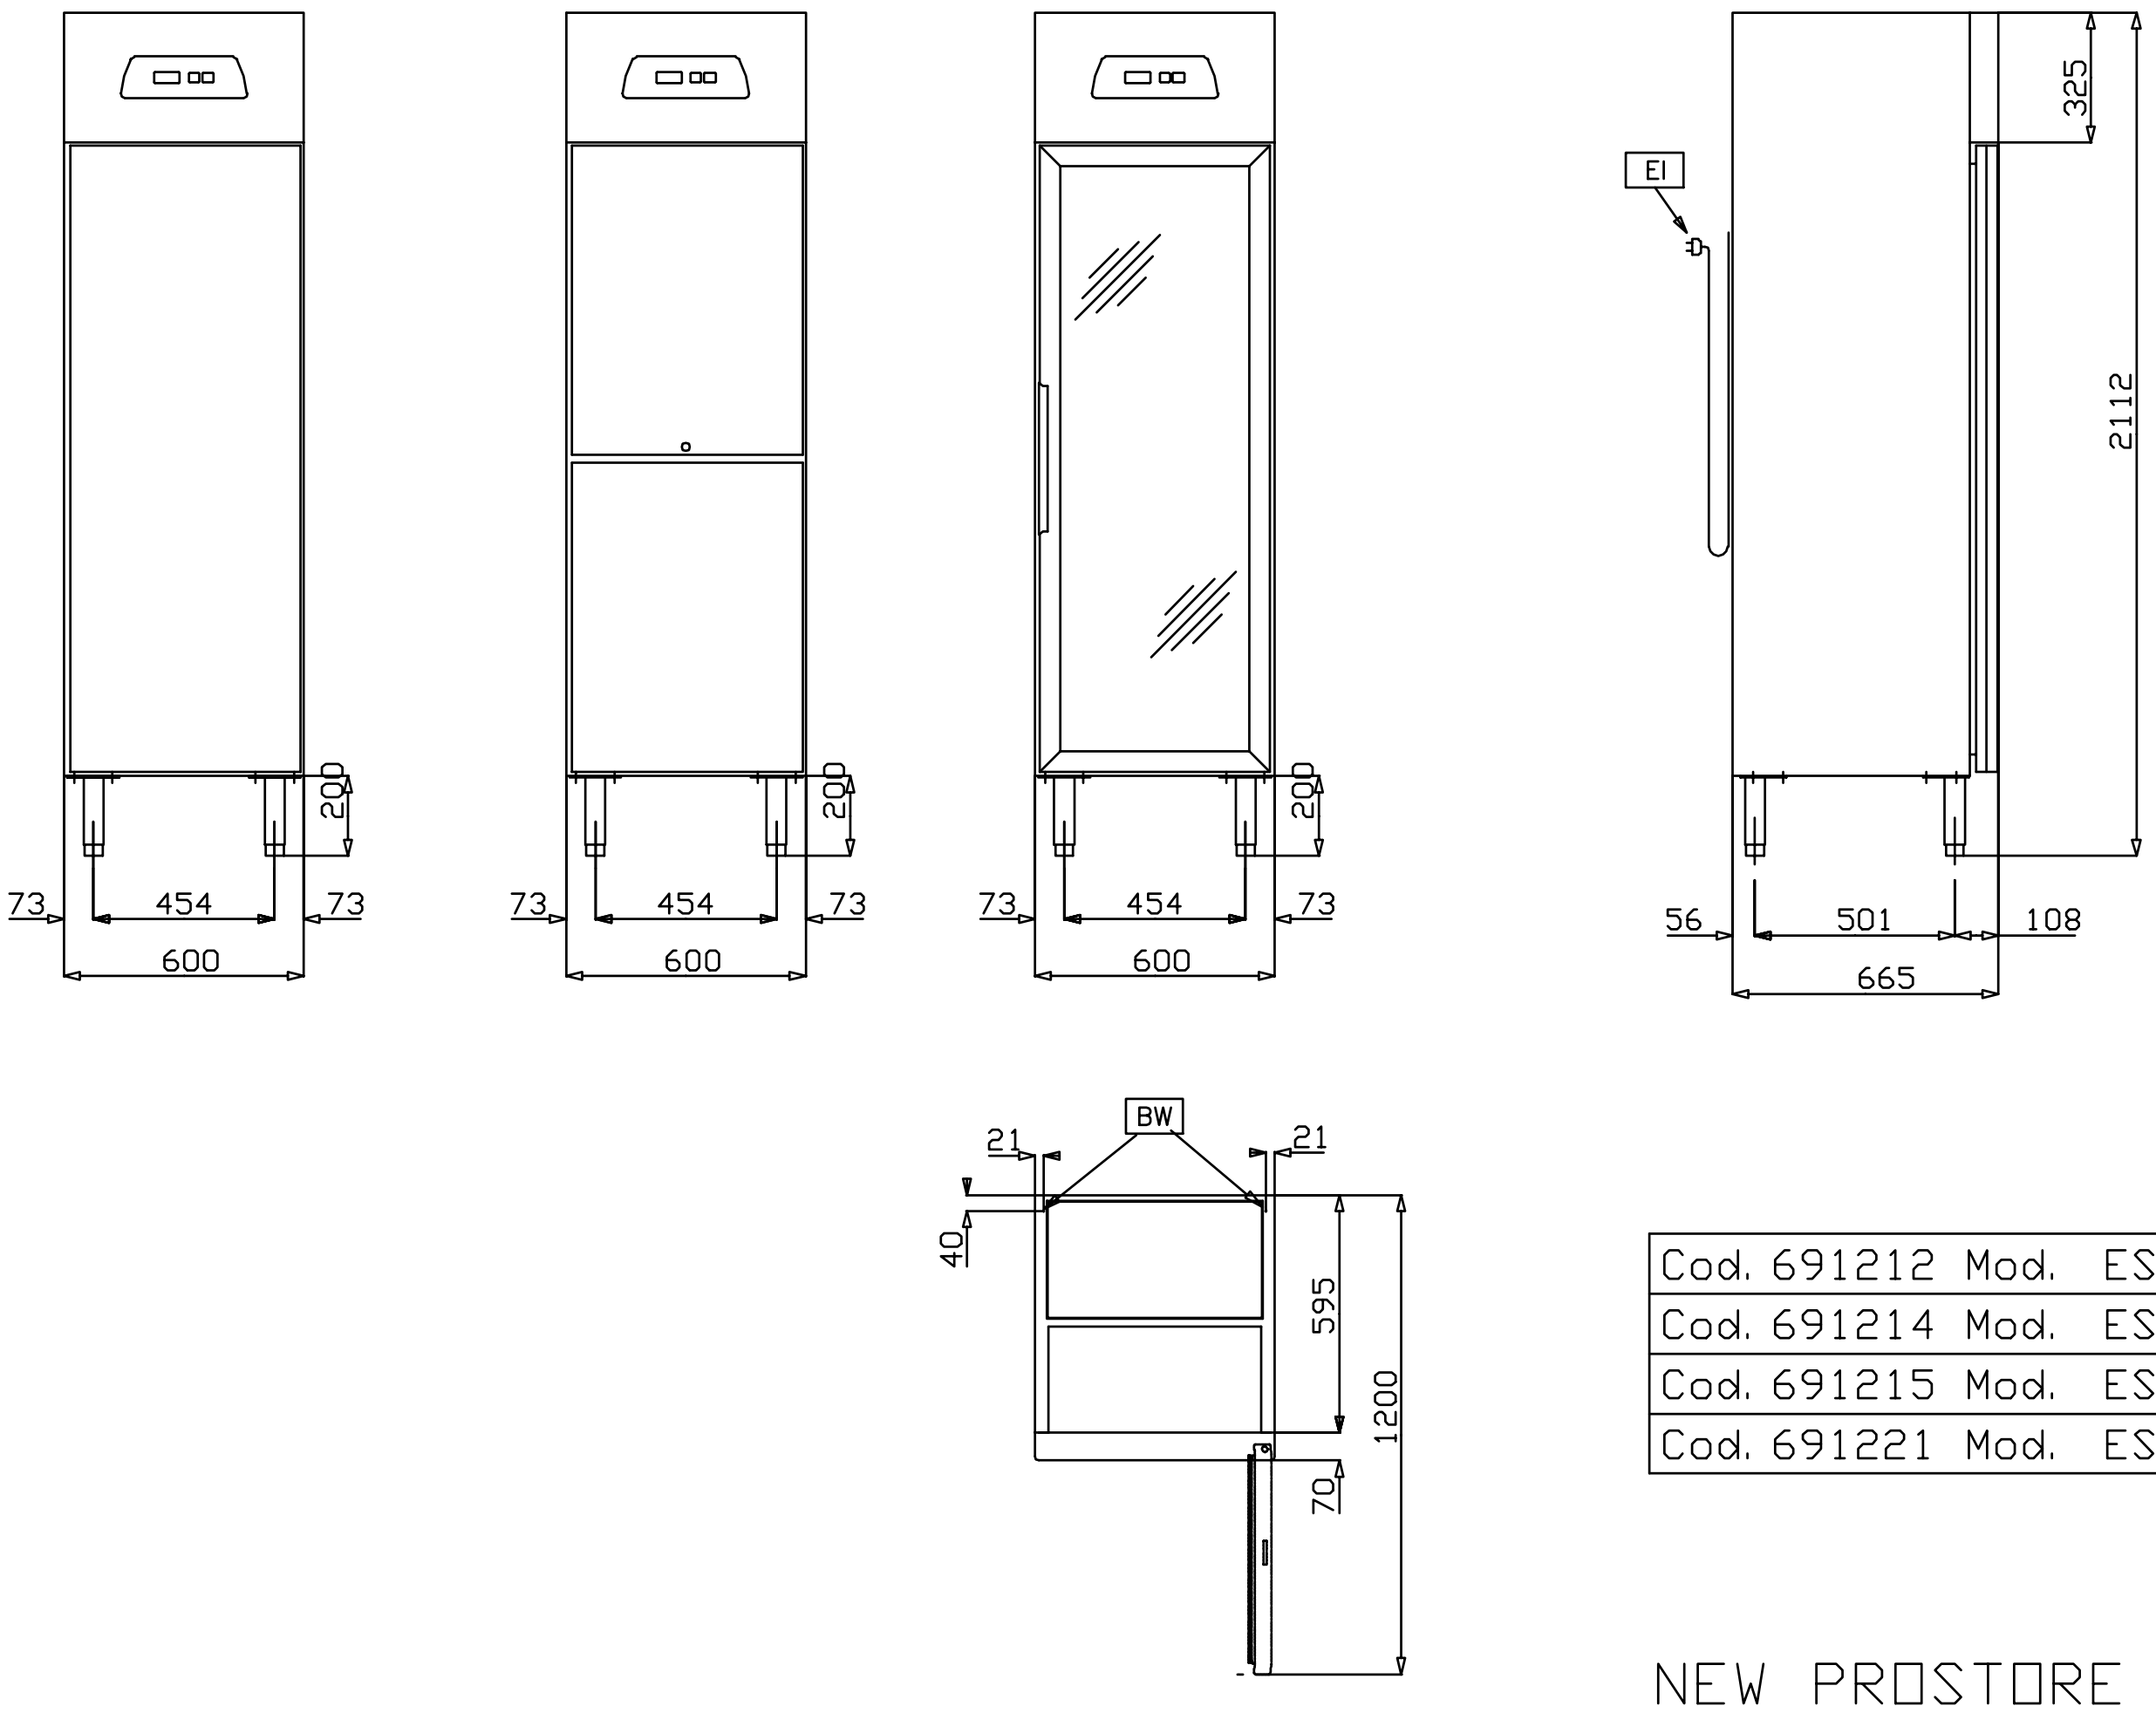


Cod.	691212	Mod.	ESR
Cod.	691214	Mod.	ESR
Cod.	691215	Mod.	ESR
Cod.	691221	Mod.	ESF

NEW PROSTORE

HAHB020

2009-10-06

LEGEND	PR04F1F 691221
EI - Electrical connection	230 V, 1N, 50

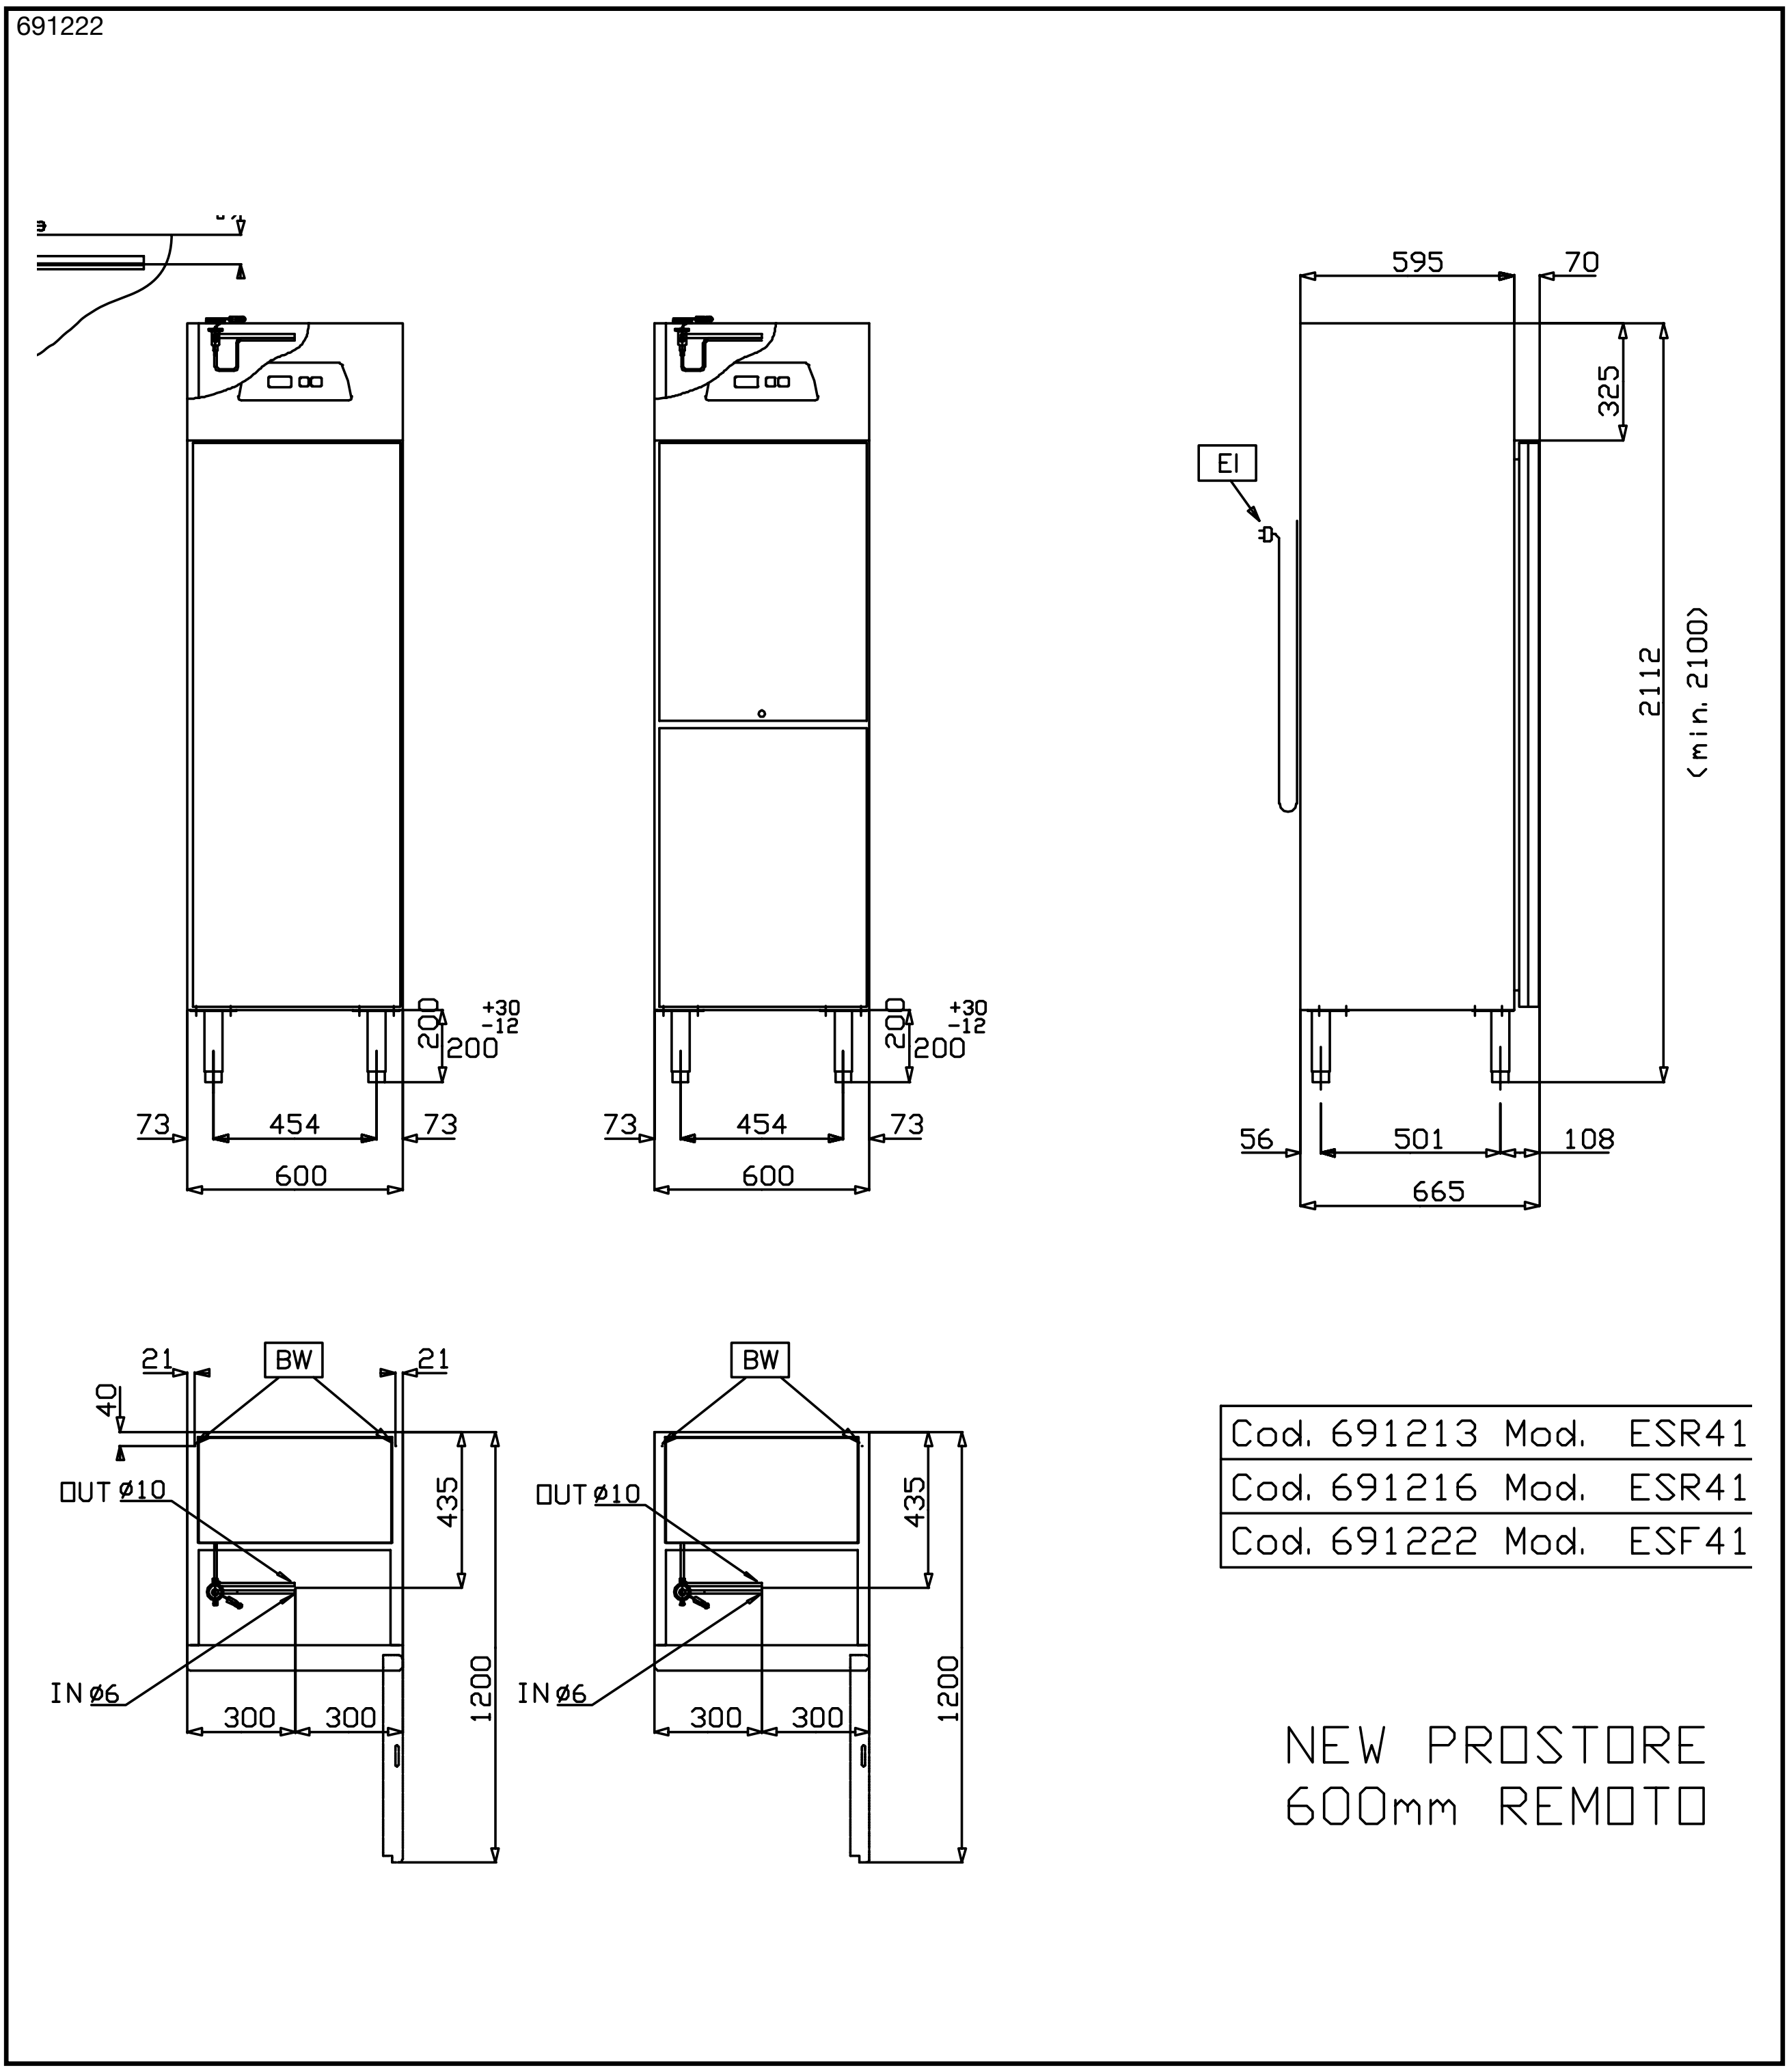

LEGEND	PR04F1FR 691222
EI - Electrical connection	230 V, 1N, 50
RI - Remote refrigeration connection	●

HAHB020

2009-10-06

Subject to change without notice